





S27

27" Ultra-Slim Kiosk

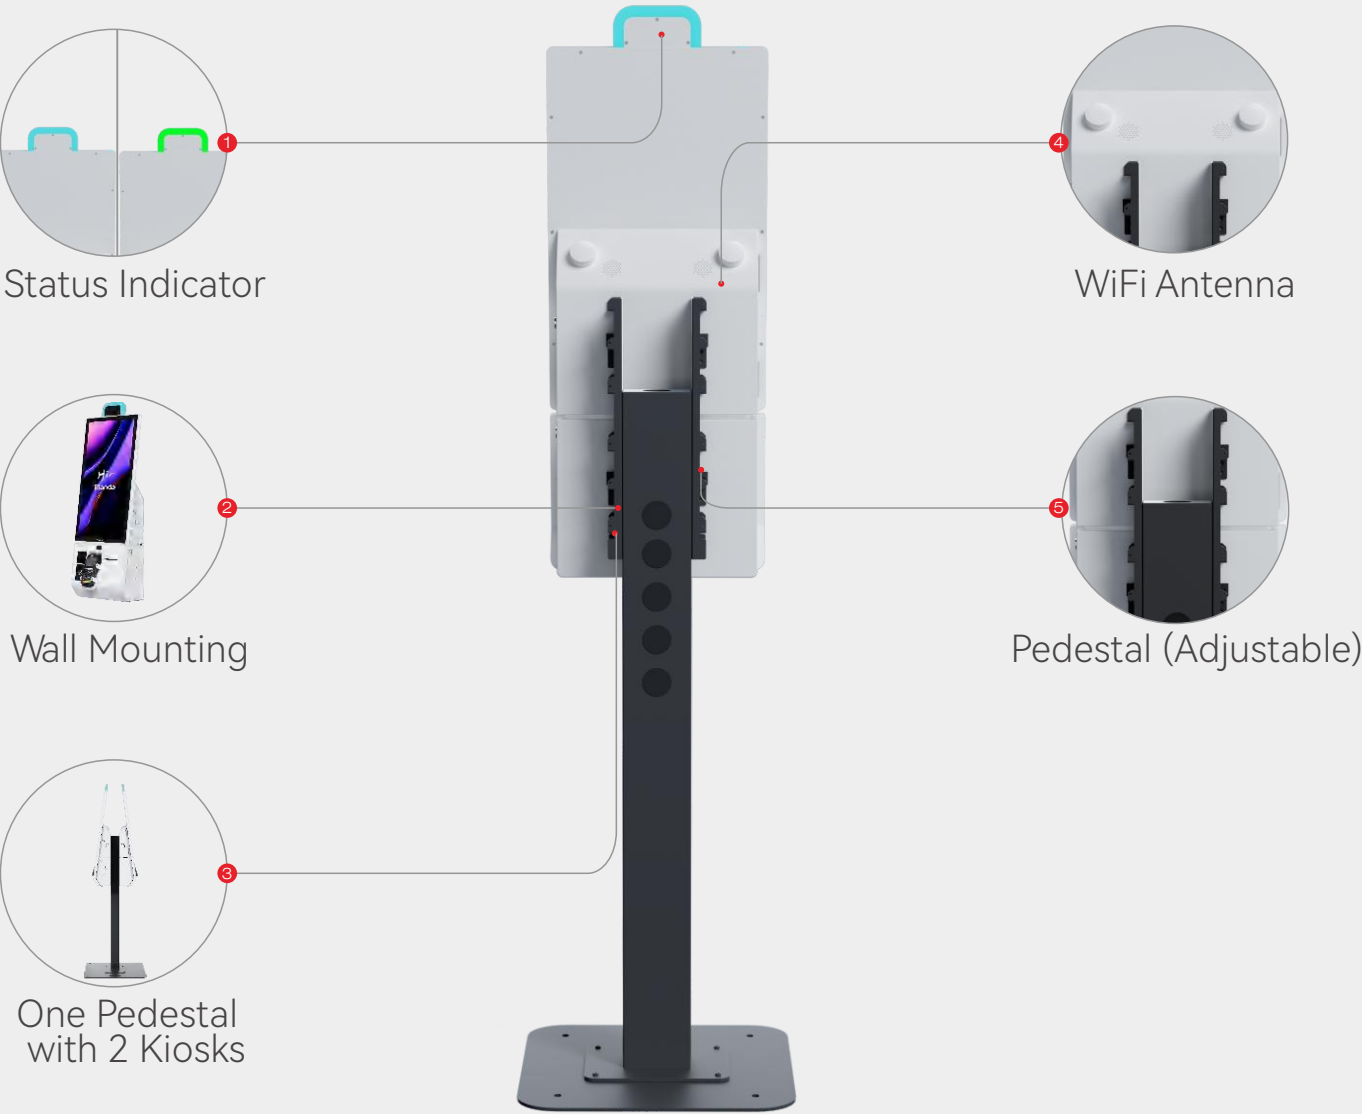

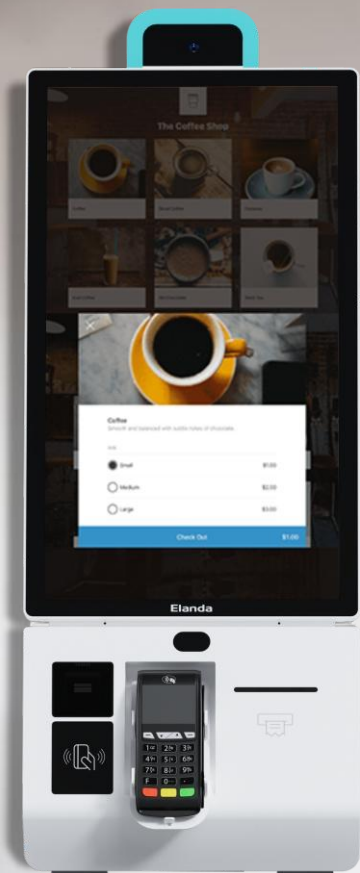




S27

27" Ultra-Slim Kiosk

Features

- Stylish, Modern Design with an 82.5° tilt for intuitive interaction
- Anti-Scratch Coating for Rugged Durability and Long-Lasting Protection
- 27" Full HD Display with Capacitive Multi Touch
- Sturdy Pedestal can support Dual Kiosks (with 3 levels Adjustable Height)
- Space-Saving Wall-Mount: 40mm from Wall to System
- Optional Modular Design for future Expansion and Customization
- High Speed Printer support Customization
- Built-in 5W Powerful speaker with AI Support Microphone
- AI Security Camera
- Triple-status LED Indicator for real-time status monitoring
- Efficient cooling system with splash-proof and dust-filtered vents
- Clean and Tidy cable management
- Unified Device and Service Management powered by ITSM Intelligence

Dimensions

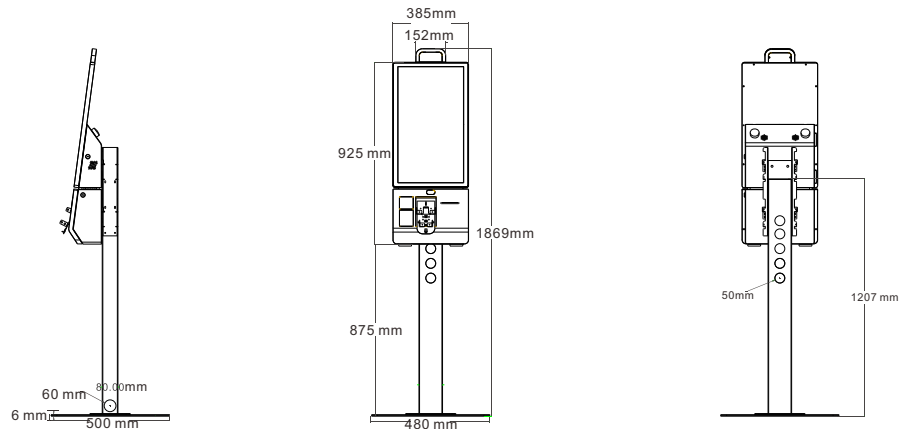

S27 Specification

SIMPLIFY RETAIL TO THE BEST

Model Number		S27		
Processor		Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz, Fan-Free	Intel® Core™ i3-1215U Processor 10M Cache, up to 4.40 GHz, Fan-Free Intel® Core™ i5-1235U Processor 12M Cache, up to 4.40 GHz, Fan-Free	Rockchip 3576, Transformer Architecture, Octa-core Processor, 6TOPS Computing Power, up to 2.2GHz, Fan-Free
System Memory		1 x DDR4, SO-DIMM, 8GB (Max. 32GB)		LPDDR5, 8G(Onboard)
Storage		1 x M.2 NVMe 128GB SSD (256GB/512GB optional)	1 x M.2 128GB SSD (256GB/512GB optional), NVMe/SATA Adaptive	eMMC 64GB
LCD	Size	27" TFT LCD Panel		
	Brightness	400-500cd/m²		
	Resolution	1080 x 1920		
Touch Screen		True-Flat Projected Capacitive Touch		
External I/O Port	USB	3 x USB3.0 + 9 x USB2.0	4 x USB3.0 + 6 x USB2.0	1 x USB3.0 + 7 x USB2.0 + 1 x Type-C
	Serial Port	2 x RJ45 + 1 x DB9		2 x RJ45
	DC-In	1 x DC-In		
	VGA	N/A		
	HDMI	2 x HDMI	1 x HDMI	N/A
	LAN	2 x LAN (10/100/1000Mb)		1 x LAN (10/100/1000Mb)
	TF Card Slot	N/A	N/A	N/A
	SIM Card Slot	N/A	N/A	1 x SIM Card Slot
	OTG Upgrade Button	N/A		1 x U-Boot
	Audio	1 x Audio (3.5mm Earphone Connector, Support Line-Out&Line-In)		
	LVDS Signal	1 x LVDS Signal (30-pin)		
	LVDS Backlight	1 x LVDS Backlight (6-pin)		
	Power Switch	1 x Power Switch		
Power		1 x 12V-5A/60W (System) + 1 x 24V-2A/48W (Printer)	1 x 12V-7A/84W (System) + 1 x 24V-2A/48W (Printer)	1 x 12V-5A/60W (system) + 1 x 24V-2A/48W(Printer)
WIFI&BT		mPCI-E WiFi2.4-5G/BT4.2		WiFi2.4-5G/BT5.0 On Board
OS Support		Windows 10 IoT LTSC, Windows 11 IoT, Ubuntu		Android 14.0
Certification		CE, FCC, UKCA, RoHS		
Environment	Operating Condition	0°C - 40°C, 20% - 85% RH Non Condensing		
	Storage Condition	15°C - 70°C, 20% - 85% RH Non Condensing		
Dimension/Weight (N.W. in Kg)	Floor Standing	480mm x 500mm x 1800mm, 54.7kg		
	Wall-mounted	385mm x 170mm x 925mm, 28Kg		
Standard	Printer	SNBC 3" Thermal Printer, Auto Cutter, 250 mm/s		
Optional	Speaker	2 x 5W Speaker		
	Scanner	WS71 (USB, 1D, 2D, Reading Precision: ≈4mil, Scan Speed: 200cm/s, Resolution 640*480, Depth of field 10-130mm))		
	NFC/RFID Reader	Support ISO/IEC 14443-A&B (MIFARE), JIS x 6319-4 (Felica), NFC Protocols - Tag Read/Write (ISO/IEC-18092)		
	Payment Device Bracket	Custom Bracket Support for Various EMV Payment Devices		
	Status Indicator	Status Indicator For MB and Printer (Red Light Indicate an Error, Blue or Green Light Indicate in Service)		
	Proximity Sensor	60~80cm Proximity Sensor		
	Pedestal	Base Plate, Column in Metal		
	Camera	5MP Camera, USB Connection AI Security Camera		
	Microphone	Microphone Supports AI Input		
	Bagging Area	Two Durable Bagging Area for items sorting and checkout		
	Security Scale	AI-powered weighing support loss prevention		
	Wall Mount Bracket	40mm from wall to System		
	Audio Navigation Keyboard (ADA/EAA/BFSG)	Integrated 3.5mm Audio Jack (6 Keys /18 Keys Optional)		